



BURGESS-MANNING

**BMBS
SEPARATOR/SILENCER**

BULLETIN 1750-8

APPLICATION



Discharge Separator/Silencer For:
Water-Sealed Vacuum Blowers and
Dry Vacuum Blowers

DESIGN

Highly efficient two-chamber snubber design removes up to 95% of the free liquid in the inlet section, and effectively reduces discharge noise over a wide band of frequencies.

CONSTRUCTION


All-welded, heavy-duty steel construction.
Exterior surfaces are prime coated.

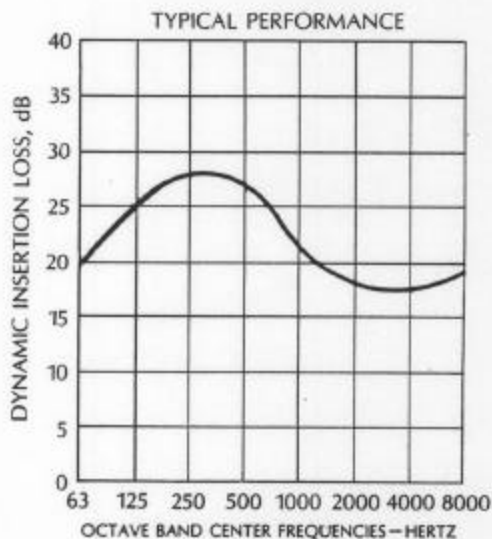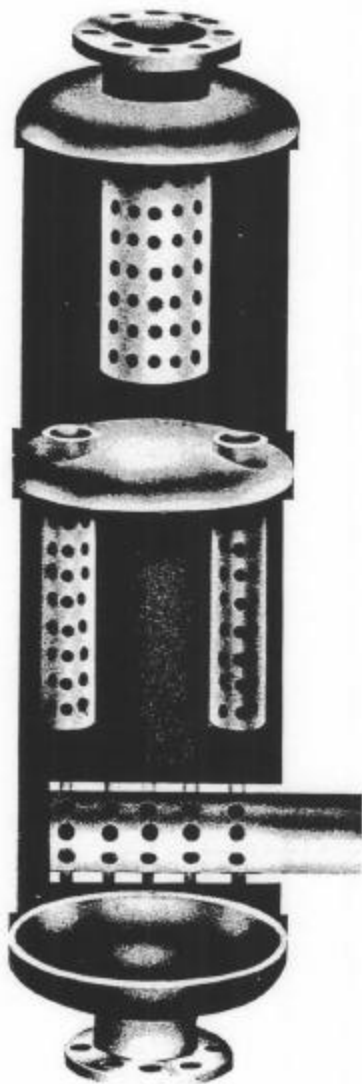

BURGESS-MANNING

Burgess-Manning, Inc.
Subsidiary of Nitram Energy, Inc.
227 Thorn Avenue
Orchard Park, New York 14127-2682
(716)662-6540 Fax: (716)662-6548

BMBS SEPARATOR/SILENCER

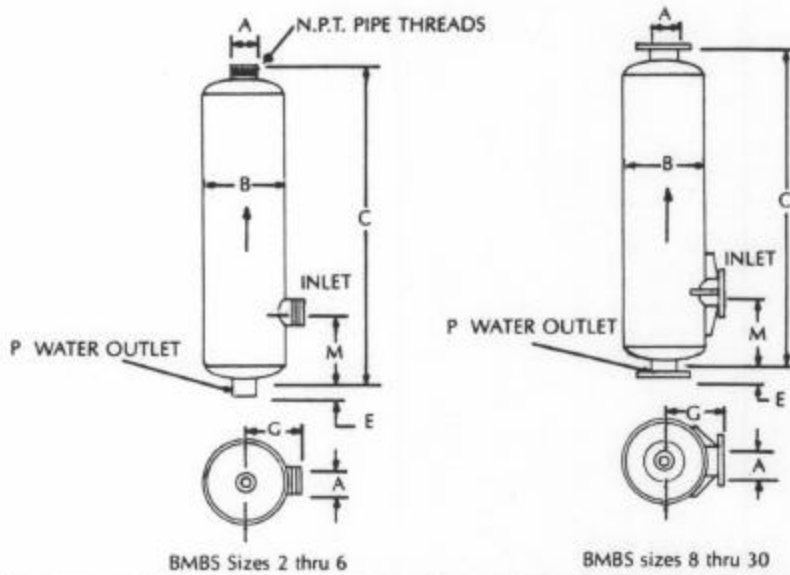

BMBS Sizes 2 thru 6

BMBS sizes 8 thru 30

Catalog Number	DIMENSIONS IN INCHES								Est. Wgt. Lbs.
	A	B	C	G	P	E	M		
							Min.	Max.	
BMBS-2	2	8	30	7	1 IPS	—	4	12½	24
BMBS-2½	2½	10	31	8	1 IPS	—	4½	13	30
BMBS-3	3	10	43	9	1½ IPS	—	5	19	55
BMBS-3½	3½	12	44	10	1½ IPS	—	5½	19	80
BMBS-4	4	14	50	10	2 IPS	—	6	21	120
BMBS-5	5	16	57	11	2 IPS	—	7	24	170
BMBS-6	6	18	70	12	2 IPS	—	8	31	230
BMBS-8	8	24	71	15	4	3	10	32	380
BMBS-10	10	24	107	15	4	3	12	51	580
BMBS-12	12	30	109	18	6	3	14	51	840
BMBS-14	14	36	112	22	6	3	15	51	1115
BMBS-16	16	42	119	25	6	3	17	57	1590
BMBS-18	18	42	149½	25	6	3	18	68	2040
BMBS-20	20	48	151	28	6	3	20	74	2390
BMBS-22	22	54	166	31	6	3	22	74	2990
BMBS-24	24	60	168	35	6	4	24	74	3965
BMBS-26	26	60	192	35	6	5	25	90	4640
BMBS-28	28	66	194	38	8	5	28	90	5250
BMBS-30	30	72	196	41	8	5	30	90	5775

Flanges are drilled to match 125 lb. American Standard Flanges. Larger units are available upon request. Specifications subject to change without notice.