




BURGESS-MANNING

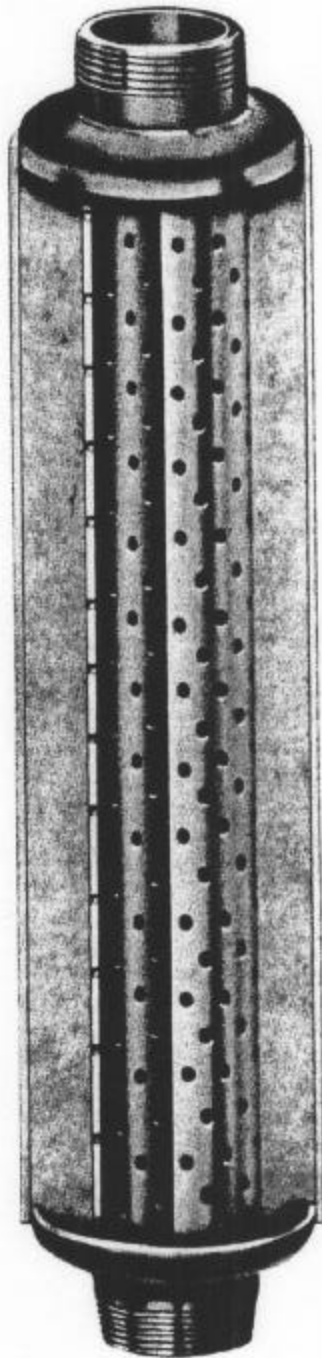

CA SILENCER BULLETIN 1810-8

APPLICATION

Intake & Exhaust Silencer For:

High frequency noise attenuation

Small Air Compressors

Centrifugal Blowers


Vacuum Pumps


DESIGN

Air flow passes straight through an acoustically perforated tube surrounded by deep layers of sound absorbing material which attenuates the noise in the high frequency range with a minimum pressure drop.

CONSTRUCTION

Silencer is of steel construction. Exterior surfaces are prime coated. Silencer is designed to handle relatively moist-free air with temperatures below 200° F. Fiberglass pack for higher temperature applications available at extra charge.

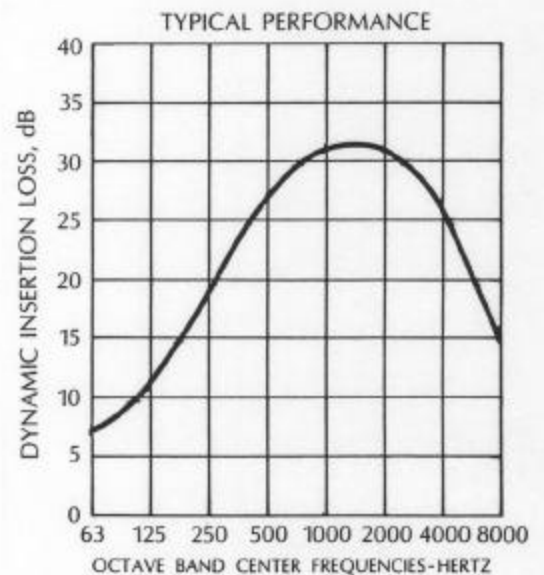

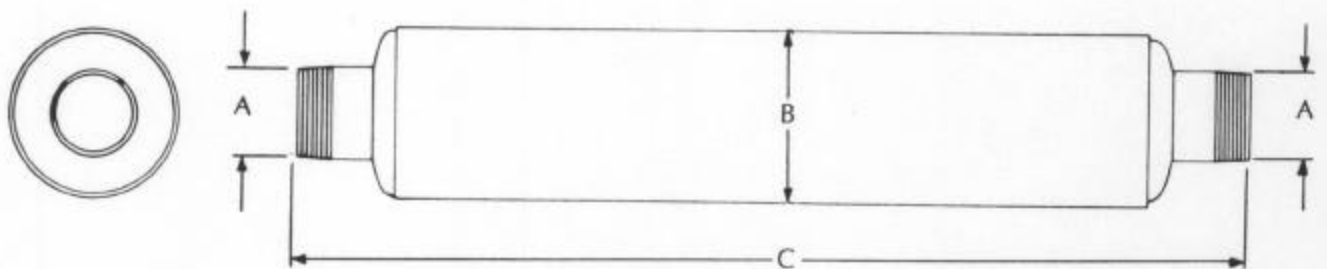

Catalog Number	DIMENSIONS IN INCHES			Est. Wgt. Lbs.
	A	B	C	
CA-1/2	1/2	3 5/8	10	1 1/2
CA-3/4	3/4	3 5/8	13	2 1/4
CA-1	1	3 5/8	16	3
CA-1 1/4	1 1/4	3 5/8	19	4
CA-1 1/2	1 1/2	4 5/8	23	5 1/4
CA-2	2	5	34 1/2	12
CA-2 1/2	2 1/2	6	35 1/2	16
CA-3	3	6 1/2	43 1/2	25
CA-4	4	10	53	56
CA-5	5	12	56	75
CA-6	6	12	66	90

Connections are threaded pipe to American Standard.
 Specifications subject to change without notice.



BURGESS-MANNING

Burgess-Manning, Inc.
 Subsidiary of Nitram Energy, Inc.
 227 Thorn Avenue
 Orchard Park, New York 14127-2682
 (716) 662-6540 Fax: (716) 662-6548